

MULTI SPLIT

SERIES



SELECTION

Choose from types of indoor units and outdoor units that can run up to six indoor units each.
Create the system that best matches room shapes and number of rooms.

R32 INDOOR UNITS		R32 OUTDOOR UNITS		
Wall-mounted MSZ-LN (18·25·35·50) MSZ-EF MSZ-AP25-50 MSZ-AP15-20 MSZ-AP60VG MSZ-BT	Floor-standing MFZ-KT Ceiling-suspended PCA Ceiling-concealed SEZ PEAD	2-port up to 2 indoor units MXZ-2F33VF3 MXZ-2F42VF3 MXZ-2F53VF(H)3 MXZ-2F53VFHZ	3-port up to 3 indoor units MXZ-3F54VF3 MXZ-3F68VF3	4-port up to 4 indoor units MXZ-4F72VF3 MXZ-4F80VF3 MXZ-4F83VF MXZ-4F83VFHZ
		5-port up to 5 indoor units MXZ-5F102VF	6-port up to 6 indoor units MXZ-6F122VF	
Cassette SLZ MLZ-KP				

R410A INDOOR UNITS		R410A OUTDOOR UNITS		
Wall-mounted MSZ-LN (25·35) MSZ-AP25-50 MSZ-AP15-20 MSZ-FH MSZ-SF25-50 MSZ-SF15-20 MSZ-EF MSZ-GF	Floor-standing MFZ-KJ Ceiling-suspended PCA Ceiling-concealed SEZ PEAD	2-port up to 2 indoor units MXZ-2D33VA MXZ-2D42VA2 MXZ-2D53VA(H)2 MXZ-2E53VAHZ	3-port up to 3 indoor units MXZ-3E54VA MXZ-3E68VA	4-port up to 4 indoor units MXZ-4E72VA MXZ-4E83VA MXZ-4E83VAHZ
		5-port up to 5 indoor units MXZ-5E102VA	6-port up to 6 indoor units MXZ-6D122VA2	
Cassette SLZ MLZ-KP PLA				

CHECK SYSTEM COMPATIBILITY

Possible combinations depends on the outdoor unit chosen. Please check the following points.

Check Indoor Units

Refer to the "Indoor Unit Compatibility Table" to check if the indoor units selected can be used with the outdoor unit selected. (Indoor units not listed in the table cannot be used.)

Check Indoor Unit Capacity Combination

Refer to the "Combination Table" to check if the capacity combination of the indoor unit selected is connectable. (Combinations not listed cannot be connected.)

If the desired combination cannot be found, please change either the indoor or outdoor unit to match one of the combinations shown in the tables.

MXZ SERIES

Advancements in the MXZ Series include efficiency and flexibility in system expansion capabilities. The best solution when requiring multi-system air conditioning needs.



R32

2-port

MXZ-2F33VF3
MXZ-2F42VF3
MXZ-2F53VF(H)3



R32

3-port 4-port

MXZ-3F54VF3
MXZ-3F68VF3
MXZ-4F72VF3
MXZ-4F80VF3



R32

4-port 5-port

MXZ-4F83VF
MXZ-5F102VF




R32

6-port

MXZ-6F122VF

EXAMPLE SYSTEM

MXZ-4F72VF system

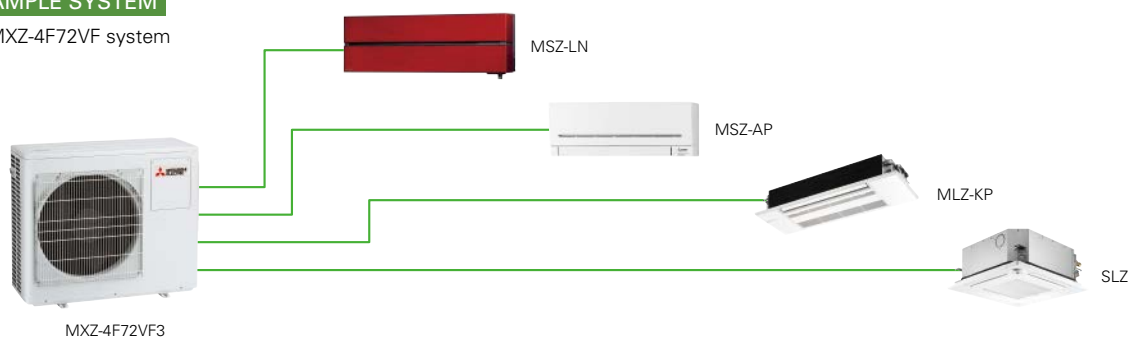

Units can be used even if it is connected to only one indoor unit (4F83/5F102/6F122)

This unit can be used even if it is connected to only one indoor unit. This offers more flexibility for wide range of application that satisfies various customers' demand.

No necessity for refrigerant charging

Depending on the pipe length and the indoor units that are connected, conventional models have required refrigerant charging, but no R32 MXZ model needs to be charged with additional refrigerant. This eliminates troublesome work at the site of installation, and reduces the amount of additional work for the installer.

Handle Up to 6 Rooms with a Single Outdoor Unit


The MXZ Series for R32 offers a ten-system line-up to choose from, ranging between 3.3 and 12.2kW. All of them are compatible with specific M, S and P series indoor units. A single outdoor unit can handle a wide range of building layouts.

Support Functions

Wiring/Piping Correction Function* (3F54/3F68/4F72/4F80/4F83/5F102/6F122)

Simply press a single button to confirm if wiring and piping are properly connected. Wiring errors are corrected automatically when discovered. This eliminates the need to confirm complicated wiring connections when expanding the system. (For details, refer to the outdoor unit installation manual.)

* Function cannot be used when the outdoor temperature is below 0°C. The correction process requires 10–20 minutes to complete and must be conducted with the unit set to the "Cooling" mode.

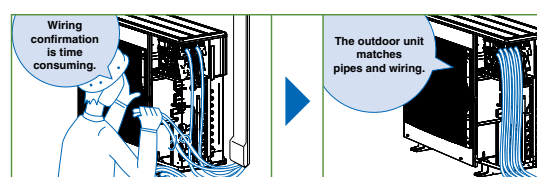

Operation Lock

To accommodate specific use applications, cooling or heating operation can be specified when setting the control board of the outdoor unit. A convenient option when a system needs to be configured for exclusive cooling or heating service. (For details, refer to the outdoor unit installation manual.)



Type (Inverter Multi - Split Heat Pump)				Up to 2 Indoor Units				Up to 3 Indoor Units		Up to 4 Indoor Units			Up to 5 Indoor Units	
Indoor Unit				Please refer to *3										
Outdoor Unit				MXZ-2F33VF3	MXZ-2F42VF3	MXZ-2F53VF3	MXZ-2F53VFH3	MXZ-3F54VF3	MXZ-3F68VF3	MXZ-4F72VF3	MXZ-4F80VF3	MXZ-4F83VF3	MXZ-5F102VF	
Refrigerant				R32 *1										
Power Supply	Source													
	Outdoor (V/Phase/Hz)	Outdoor power supply 220 - 230 - 240V / Single / 50Hz												
Cooling	Capacity	Rated	kW	3.3	4.2	5.3	5.3	5.4	6.8	7.2	8.0	8.3	10.2	
	Input	Rated	kW	0.85	0.98	1.40	1.40	1.32	1.84	1.85	2.25	1.97	2.80	
	EER* ³			3.88	4.29	3.79	3.79	4.10	3.70	3.89	3.56	4.21	3.64	
	Design Load		kW	3.3	4.2	5.3	5.3	5.4	6.8	7.2	8.0	8.3	10.2	
	Annual Electricity Consumption* ²		kWh/a	189	169	216	216	222	301	311	368	342	436	
	SEER* ^{3,4,5}			6.1	8.7	8.6	8.6	8.5	7.9	8.1	7.6	8.5	8.2	
		Energy Efficiency Class* ³		A++	A+++	A+++	A+++	A+++	A++	A++	A++	A+++	A++	
Heating (Average Season)	Capacity	Rated	kW	4.0	4.5	6.4	6.4	7.0	8.6	8.6	8.8	9.3	10.5	
	Input	Rated	kW	0.91	0.88	1.56	1.56	1.40	1.91	1.87	2.00	2.00	2.28	
	COP* ³			4.40	5.11	4.10	4.10	5.00	4.50	4.60	4.40	4.65	4.60	
	Design Load		kW	2.7	3.5	3.5	3.5	5.2	6.8	7.0	7.0	7.4	7.4	
	Declared Capacity	at reference design temperature	kW	2.2	2.7	2.7	2.7	4.2	5.7	5.6	5.6	5.8	5.9	
		at bivalent temperature	kW	2.4	2.9	2.9	2.9	4.7	6.4	6.2	6.2	6.2	6.4	
		at operation limit temperature	kW	1.6	2.3	2.3	2.1	3.2	4.6	4.8	4.8	4.9	4.9	
	Back Up Heating Capacity		kW	0.5	0.8	0.8	0.8	1.0	1.1	1.4	1.4	1.2	1.5	
	Annual Electricity Consumption* ²		kWh/a	944	1065	1065	1089	1583	2321	2389	2389	2087	2205	
	SCOP* ^{3,4,5}			4.0	4.6	4.6	4.5	4.6	4.1	4.1	4.1	4.7	4.7	
		Energy Efficiency Class* ³		A+	A++	A++	A+	A++	A+	A+	A+	A++	A++	
Operating Current (max)				A	10.0	12.2	12.2	12.2	18.0	18.0	18.0	21.4	21.4	
Outdoor Unit	Dimensions	H x W x D	mm	550 - 800 (+69) - 285 (+59.5)				710 - 840 (+30) - 330 (+66)				796 - 950 - 330		
	Weight		kg	33	37	37	38	58	58	59	59	62	62	
	Air Volume	Cooling	m ³ /min	31.5	28.4	32.7	32.7	31	35.4	35.4	40.3	57	63	
		Heating	m ³ /min	32.3	33.5	34.7	34.7	31	39.6	42.7	44.1	62	75	
	Sound Level (SPL)	Cooling	dB(A)	49	44	46	46	46	48	48	50	49	52	
		Heating	dB(A)	50	50	51	51	50	53	54	55	51	56	
	Sound Level (PWL)	Cooling	dB(A)	60	59	61	61	60	63	63	65	61	65	
		Heating	dB(A)	60	59	61	61	60	63	63	65	61	65	
	Operating Current	Cooling	A	4.3 - 4.1 - 3.9	4.9 - 4.7 - 4.5	6.5 - 6.2 - 6.0	6.5 - 6.2 - 6.0	6.0 - 5.7 - 5.5	8.4 - 8.0 - 7.7	8.5 - 8.1 - 7.8	10.3 - 9.9 - 9.5	9.1 - 8.7 - 8.3	12.9 - 12.3 - 11.8	
		Heating	A	4.6 - 4.4 - 4.2	4.4 - 4.3 - 4.1	7.5 - 7.1 - 6.8	7.5 - 7.1 - 6.8	6.4 - 6.1 - 5.9	8.8 - 8.4 - 8.0	8.6 - 8.2 - 7.9	9.2 - 8.8 - 8.4	9.2 - 8.8 - 8.4	10.5 - 10.0 - 9.6	
Breaker Size		A	15	15	15	15	25	25	25	25	25	25		
Ext. Piping	Port Diameter	Liquid / Gas	mm	6.35 x 2 / 9.52 x 2		6.35 x 2 / 9.52 x 2		6.35 x 3 / 9.52 x 3		6.35 x 3 / 9.52 x 3		6.35 x 4 / 12.7 x 1 + 9.52 x 3		6.35x5/12.7x1+9.52x4
	Total Piping Length (max)		m	20	30	30	30	50	60	60	60	70	80	
	Each Indoor Unit Piping Length (max)		m	15	20	20	20	25	25	25	25	25	25	
	Max. Height		m	10	15(15)	15(15)	15(15)	15(15)	15(15)	15(15)	15(15)	15	15	
	Chargeless Length		m	20	30	30	30	50	60	60	60	70	80	
Guaranteed Operating Range [Outdoor]		Cooling	°C	-10 ~ +46				-10 ~ +46				-10 ~ +46		
		Heating	°C	-15 ~ +24				-20 ~ +24				-15 ~ +24		

Type (Inverter Multi - Split Heat Pump)				Up to 6 Indoor Units	
Indoor Unit				Please refer to (*4)	
Outdoor Unit				MXZ-6F122VF	
Refrigerant				R32* ¹	
Power Supply	Source	Outdoor power supply			
	Outdoor (V/Phase/Hz)	220 - 230 - 240V / Single / 50			
Cooling	Capacity	Rated	kW	12.2	
	Input	Rated	kW	3.66	
	EER* ⁴			3.33	
Heating	Capacity	Rated	kW	14.0	
	Input	Rated	kW	3.31	
	COP* ⁴			4.23	
Operating Current (max)			A	29.8	
Outdoor Unit	Dimensions	H × W × D	mm	1048 - 950 - 330	
	Weight		kg	87	
	Air Volume	Cooling	m ³ /min	63	
		Heating	m ³ /min	77	
	Sound Level (SPL)	Cooling	dB(A)	55	
		Heating	dB(A)	57	
	Sound Level (PWL)	Cooling	dB(A)	69	
	Breaker Size		A	32	
Ext. Piping	Diameter	Liquid	mm	6.35 × 6	
		Gas	mm	12.7 × 1 + 9.52 × 5	
	Total Piping Length (max)		m	80	
	Each Indoor Unit Piping Length (max)		m	25	
	Max. Height		m	15	
	Chargeless Length		m	80	
Guaranteed Operating Range [Outdoor]		Cooling	°C	-10 ~ +46	
		Heating	°C	-15 ~ +24	

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere.
This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.
The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results.

*3 Actual energy consumption will depend on how the appliance is used and where it is located.

*4 EER/COP, SEER/SCOP values and energy efficiency class are measured when connected to the indoor units listed below.

MXZ-2F33VF3 → MSZ-AP15VG + MSZ-LN18VG2
MXZ-2F42VF3 → MSZ-LN18VG2 + MSZ-LN25VG2
MXZ-2F53VF(H)3 → MSZ-LN18VG2 + MSZ-LN35VG2
MXZ-3F54VF3 → MSZ-LN18VG2 + MSZ-LN18VG2 + MSZ-LN18VG2
MXZ-3F68VF3 → MSZ-LN18VG2 + MSZ-LN25VG2 + MSZ-LN25VG2
MXZ-4F72VF3 → MSZ-LN18VG2 + MSZ-LN18VG2 + MSZ-LN18VG2 + MSZ-LN18VG2
MXZ-4F80VF3 → MSZ-LN18VG2 + MSZ-LN18VG2 + MSZ-LN18VG2 + MSZ-LN25VG2
MXZ-4F83VF → MSZ-LN18VG2 + MSZ-LN18VG2 + MSZ-LN25VG2 + MSZ-LN25VG2
MXZ-5F102VF → MSZ-LN18VG2 + MSZ-LN18VG2 + MSZ-LN18VG2 + MSZ-LN25VG2 + MSZ-LN25VG2

*5 EER/COP, values and energy efficiency class are measured when connected to the indoor units listed below.

MXZ-6F122VF → MSZ-LN18VG2 + MSZ-LN18VG2 + MSZ-LN18VG2 + MSZ-LN25VG2 + MSZ-LN25VG2

*6 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.

MXZ SERIES

Advancements in the MXZ Series include efficiency and flexibility in system expansion capabilities. The best solution when requiring multi-system air conditioning needs.



R410A

2-port

MXZ-2D33VA
MXZ-2D42VA2
MXZ-2D53VA(H)2



R410A

3-port 4-port

MXZ-3E54VA
MXZ-3E68VA
MXZ-4E72VA



R410A

4-port 5-port

MXZ-4E83VA
MXZ-5E102VA




R410A

6-port

MXZ-6D122VA2

EXAMPLE SYSTEM

MXZ-6D122VA2 system

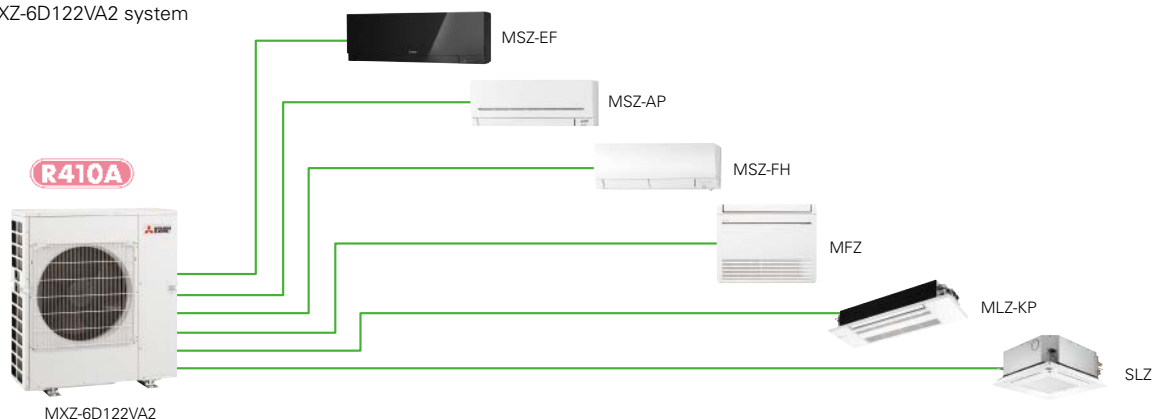

Handle Up to 6 Rooms with a Single Outdoor Unit


The MXZ Series offers a nine-system line-up to choose from, ranging between 3.3 and 12.2kW. All of them are compatible with specific M, S and P series indoor units. A single outdoor unit can handle a wide range of building layouts.

Support Functions

Wiring/Piping Correction Function* (3E54/3E68/4E72/4E83/5E102/6D122)

Simply press a single button to confirm if wiring and piping are properly connected. Wiring errors are corrected automatically when discovered. This eliminates the need to confirm complicated wiring connections when expanding the system. (For details, refer to the outdoor unit installation manual.)

* Function cannot be used when the outdoor temperature is below 0°C. The correction process requires 10–20 minutes to complete and must be conducted with the unit set to the "Cooling" mode.

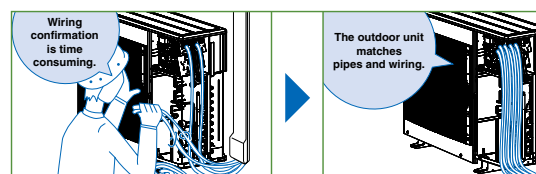

Ampere Limit Adjustment*

(4E83/5E102/6D122)

Dipswitch settings can be used to adjust the maximum electrical current for operation. This function is highly recommended for managing energy costs. (For details, refer to the outdoor unit installation manual.)

* Maximum capacity is lowered with the use of this function.

Operation Lock

To accommodate specific use applications, cooling or heating operation can be specified when setting the control board of the outdoor unit. A convenient option when a system needs to be configured for exclusive cooling or heating service. (For details, refer to the outdoor unit installation manual.)



Type (Inverter Multi - Split Heat Pump)				Up to 2 Indoor Units				Up to 3 Indoor Units		Up to 4 Indoor Units		Up to 5 Indoor Units	
Indoor Unit				Please refer to (*4)									
Outdoor Unit				N: MXZ-2D33VA	N: MXZ-2D42VA2	N: MXZ-2D53VA2	N: MXZ-2D53VAH2	N: MXZ-3E54VA	N: MXZ-3E68VA	N: MXZ-4E72VA	MXZ-4E83VA	MXZ-5E102VA	
Refrigerant				R410A*1									
Power Supply	Source												
	Outdoor (V/Phase/Hz)	Outdoor power supply 220 - 230 - 240V / Single / 50											
Cooling	Capacity	Rated	kW	3.3	4.2	5.3	5.3	5.4	6.8	7.2	8.3	10.2	
		Min - Max	kW	1.1 - 3.8	1.1 - 4.4	1.1 - 5.6	1.1 - 5.6	2.9 - 6.8	2.9 - 8.4	3.7 - 8.8	3.7 - 9.2	3.9 - 11.0	
	Input (Indoor+Outdoor)	Rated	kW	0.90	1.00	1.54	1.54	1.35	2.19	2.25	2.44	3.15	
	Design Load	kW	3.3	4.2	5.3	5.3	5.4	6.8	7.2	8.3	10.2		
	Annual Electricity Consumption*2	kWh/a	211	216	262	262	295	425	443	460	537		
	SEER*4, *7		5.5	6.8	7.1	7.1	6.4	5.6	5.7	6.3	6.6		
	Energy Efficiency Class*4		A	A++	A++	A++	A++	A+	A+	A+	A++	A++	
Heating (Average Season)	Capacity	Rated	kW	4.0	4.5	6.4	6.4	7.0	8.6	8.6	9.3	10.5	
		Min - Max	kW	1.0 - 4.1	1.0 - 4.8	1.0 - 7.0	1.0 - 7.0	2.6 - 9.0	2.6 - 10.6	3.4 - 10.7	3.4 - 11.6	4.1 - 14.0	
	Input (Indoor+Outdoor)	Rated	kW	0.96	0.93	1.70	1.70	1.59	2.38	2.28	2.00	2.34	
	Design Load	kW	2.7	3.2	4.5	4.5	5.0	6.8	7.0	8.7	8.9		
	Declared Capacity	at reference design temperature	kW	2.1	2.7	3.7	3.6	4.0	5.4	5.6	7.1	7.3	
		at bivalent temperature	kW	2.4	3.0	4.0	4.0	4.49	6.0	6.2	7.8	7.9	
		at operation limit temperature	kW	1.7	2.3	3.3	3.0	3.17	4.4	4.7	6.0	6.3	
	Back Up Heating Capacity	kW	0.6	0.5	0.8	0.9	1.0	1.4	1.4	1.6	1.6		
	Annual Electricity Consumption*2	kWh/a	926	1065	1507	1546	1751	2466	2516	2889	2958		
	SCOP*4, *7		4.1	4.2	4.2	4.1	4.0	3.9	3.9	4.2	4.2		
	Energy Efficiency Class*4		A+	A+	A+	A+	A+	A	A	A+	A+		
Max. Operating Current (Indoor+Outdoor)			A	10.0	12.2	12.2	12.2	18.0	18.0	18.0	21.4	21.4	
Outdoor Unit	Dimensions	H x W x D	mm	550 - 800(+69) - 285(+59.5)				710 - 840(+30) - 330(+66)				796 - 950 - 330	
	Weight		kg	32	37	37	38	58	58	59	63	64	
	Air Volume	Cooling	m³/min	32.9	27.7	32.9	32.9	42.1	42.1	42.1	55.6	65.1	
		Heating	m³/min	33.7	33.3	33.3	33.3	43.0	43.0	43.0	55.6	68.0	
	Sound Level (SPL)	Cooling	dB(A)	49	46	50	50	50	50	50	49	52	
		Heating	dB(A)	50	51	53	53	53	53	53	51	56	
	Sound Level (PWL)	Cooling	dB(A)	63	60	64	64	64	64	64	61	65	
	Breaker Size		A	10	15	15	15	25	25	25	25	25	
Ext. Piping	Diameter	Liquid	mm	6.35 x 2	6.35 x 2	6.35 x 2	6.35 x 2	6.35 x 3	6.35 x 3	6.35 x 4	6.35 x 4	6.35 x 5	
		Gas	mm	9.52 x 2	9.52 x 2	9.52 x 2	9.52 x 2	9.52 x 3	9.52 x 3	12.7x1+9.52x3	12.7x1+9.52x3	12.7x1+9.52x4	
	Total Piping Length (max)		m	20	30	30	30	50	60	60	70	80	
	Each Indoor Unit Piping Length (max)		m	15	20	20	20	25	25	25	25	25	
	Max. Height		m	10	15 (10)*3	15 (10)*3	15 (10)*3	15 (10)*3	15 (10)*3	15 (10)*3	15 (10)*3	15 (10)*3	
	Chargeless Length		m	20	20	20	20	40	40	40	25	0	
Guaranteed Operating Range [Outdoor]	Cooling	°C		-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	
		°C		-15 ~ +24	-15 ~ +24	-15 ~ +24	-20 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	

N: Please refer to the NOTE below.

Type (Inverter Multi - Split Heat Pump)				Up to 6 Indoor Units			
Indoor Unit				Please refer to (*5)			
Outdoor Unit				MXZ-6D122VA2			
Refrigerant				R410A*1			
Power Supply				Outdoor power supply			
Source Outdoor (V/Phase/Hz)				220 - 230 - 240V / Single / 50			
Cooling	Capacity	Rated	kW	12.2			
		Min - Max	kW	3.5 - 13.5			
	Input*5	Rated	kW	3.66			
		EER*6		3.33			
	EEL Rank			A			
	COP*5			4.23			
Heating	Capacity	Rated	kW	14.0			
		Min - Max	kW	3.5 - 16.5			
	Input*5	Rated	kW	3.31			
		EEL Rank		A			
	Operating Current (max)*5			A			
	Dimensions			H x W x D	mm		
Ext. Piping	Weight		kg	1048 - 950 - 330			
			mm	88			
	Air Volume	Cooling	m ³ /min	63.0			
		Heating	m ³ /min	77.0			
	Sound Level (SPL)	Cooling	dB(A)	55			
		Heating	dB(A)	57			
	Sound Level (PWL)	Cooling	dB(A)	70			
		Breaker Size	A	32			
	Diameter	Liquid	mm	6.35 x 6			
		Gas	mm	12.7 x 1 + 9.52 x 5			
Guaranteed Operating Range [Outdoor]	Total Piping Length (max)			m	80		
	Each Indoor Unit Piping Length (max)			m	25		
	Max. Height			m	15 (10)*3		
	Chargeless Length			m	30		
Guaranteed Operating Range [Outdoor]	Cooling	°C		-10 ~ +46			
		°C		-15 ~ +24			

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 If the outdoor unit is installed higher than the indoor unit, max. height is reduced to 10m.

*4 EER/COP, EEL rank, SEER/SCOP values and energy efficiency class are measured when connected to the indoor units listed below.

MXZ-2D33VA → MSZ-SF15VA + MSZ-EF18VE
MXZ-2D42VA2 → MSZ-EF18VE + MSZ-EF25VE
MXZ-2D53VA(H)2 → MSZ-EF18VE + MSZ-EF35VE
MXZ-3E54VA → MSZ-EF18VE + MSZ-EF18VE + MSZ-EF18VE
MXZ-3E68VA → MSZ-EF18VE + MSZ-EF25VE + MSZ-EF25VE
MXZ-4E72VA → MSZ-EF18VE + MSZ-EF18VE + MSZ-EF18VE + MSZ-EF18VE
MXZ-4E83VA → MSZ-EF18VE + MSZ-EF18VE + MSZ-EF22VE + MSZ-EF25VE
MXZ-5E102VA → MSZ-EF18VE + MSZ-EF18VE + MSZ-EF22VE + MSZ-EF22VE

*5 Power input and operating current (max) figures are for outdoor unit only

*6 EER/COP, EEL rank, values and energy efficiency class are measured when connected to the indoor units listed below.

MXZ-6D122VA2 → MSZ-EF18VE + MSZ-EF18VE + MSZ-EF18VE + MSZ-EF18VE + MSZ-EF25VE

*7 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.

NOTE

When connecting the MFZ-KJ series indoor unit(s) to this outdoor unit, charge additional refrigerant according to the instructions in the diagram below.

MXZ-2D33VA

No. of MFZ-KJ indoor units	Pipe length (L)	Maximum amount of refrigerant
1 unit	~20m 100g additional (Total 1250g)	1250g
2 units	Not available (Only one MFZ-KJ series indoor unit can be connected.)	

MXZ-2D42VA2 MXZ-2D53VA2 MXZ-2D53VAH2

No. of MFZ-KJ indoor units	Pipe length (L)		Maximum amount of refrigerant
1 unit	~20m 100g additional (Total 1400g)	~30m 100g+{(L-20)m×20g/m}	1600g
2 units	200g additional (Total 1500g)	200g+{(L-20)m×20g/m}	1700g

MXZ-3E54VA

No. of MFZ-KJ indoor units	Pipe length (L)		Maximum amount of refrigerant
1 unit	~40m 100g additional (Total 2800g)	~50m 100g+{(L-40)m×20g/m}	3000g
2 units	200g additional (Total 2900g)	200g+{(L-40)m×20g/m}	3100g
3 units	300g additional (Total 3000g)	300g+{(L-40)m×20g/m}	3200g

MXZ-3E68VA MXZ-4E72VA

No. of MFZ-KJ indoor units	Pipe length (L)		Maximum amount of refrigerant
1 unit	~40m 100g additional (Total 2800g)	~60m 100g+{(L-40)m×20g/m}	3200g
2 units	200g additional (Total 2900g)	200g+{(L-40)m×20g/m}	3300g
3 units	300g additional (Total 3000g)	300g+{(L-40)m×20g/m}	3400g

MXZ-HA SERIES

Multi-port outdoor units exclusively for MSZ-HR indoor units.



R32

2-port

MXZ-2HA40VF
MXZ-2HA50VF



R32

3-port

MXZ-3HA50VF

Stylish Design with Flat Panel Front


A stylish flat panel design is employed for the front of the indoor unit. The simple look matches room aesthetics.




Easy to create various combinations

Wide range of simple combinations only possible using multi-port outdoor units.


Two bedrooms

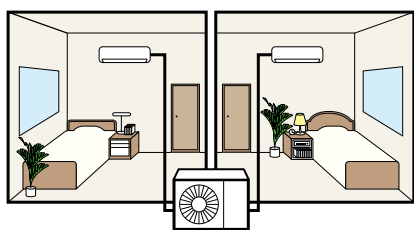


Three bedrooms

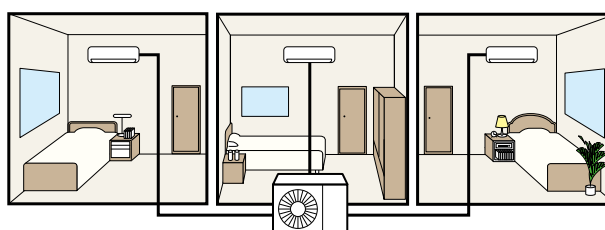

Living room and one bedroom

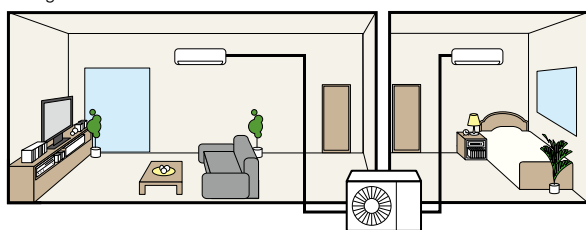

Wide living room

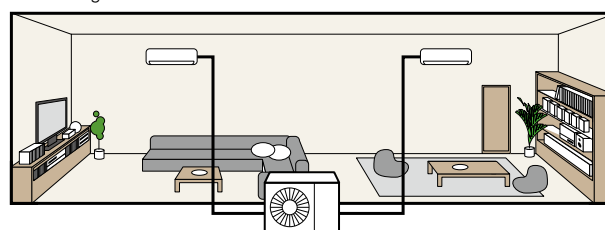



Type (Inverter Multi - Split Heat Pump)				Up to 2 Indoor Units		Up to 3 Indoor Units		
Indoor Unit				Please refer to (*4)				
Outdoor Unit				MXZ-2HA40VF	MXZ-2HA50VF	MXZ-3HA50VF		
Refrigerant				R32*1				
Power Supply	Source			Outdoor power supply				
	Outdoor (V/Phase/Hz)			220-230-240 / Single / 50				
Cooling	Capacity	Rated	kW	4.0	5.0	5.0		
	Input*4	Rated	kW	1.05	1.52	1.26		
	EER*4			3.81	3.29	3.97		
		EEL Rank*4		A	A	A		
	Design Load		kW	4.0	5.0	5.0		
	Annual Electricity Consumption*2		kWh/a	172	225	241		
	SEER			8.12	7.78	7.26		
		Energy Efficiency Class*4		A++	A++	A++		
	Capacity	Rated	kW	4.3	6.0	6.0		
	Input	Rated	kW	0.91	1.54	1.30		
Heating (Average Season)	COP*4			4.73	3.90	4.62		
		EEL Rank*4		A	A	A		
	Design Load		kW	3.2	3.2	4.0		
	Declared Capacity	at reference design temperature	kW	2.4	2.4	3.0		
		at bivalent temperature	kW	2.9	2.9	3.6		
		at operation limit temperature	kW	2.1	2.1	2.6		
	Back Up Heating Capacity		kW	0.8	0.8	1.0		
	Annual Electricity Consumption*2		kWh/a	1043	1043	1394		
	SCOP*4,*5			4.30	4.30	4.02		
		Energy Efficiency Class*4		A+	A+	A+		
Operating Current (max)			A	12.2	12.2	18.0		
Outdoor Unit	Dimensions	H x W x D	mm	550 - 800 (+69) - 285 (+59.5)	550 - 800 (+69) - 285 (+59.5)	710 - 840 (+30) - 330 (+66)		
	Weight		kg	37	37	57		
	Air Volume	Cooling	m³/min	28.4	32.7	31.0		
		Heating	m³/min	33.5	34.7	29.1		
	Sound Level (SPL)	Cooling	dB(A)	44	47	46		
		Heating	dB(A)	50	51	50		
	Sound Level (PWL)	Cooling	dB(A)	59	64	61		
	Operating Current	Cooling	A	4.9	6.8	5.6		
		Heating	A	4.6	6.9	5.8		
	Breaker Size		A	15	15	25		
	Ext. Piping	Port Diameter	Liquid / Gas	mm	6.35 x 2 / 9.52 x 2	6.35 x 2 / 9.52 x 2	6.35 x 3 / 9.52 x 3	
		Total Piping Length (max)		m	30	30	50	
		Each Indoor Unit Piping Length (max)		m	20	20	25	
Max. Height			m	15 (10)*3	15 (10)*3	15 (10)*3		
Chargeless Length			m	30	30	40		
Guaranteed Operating Range [Outdoor]		Cooling	°C	-10 ~ +46				
		Heating	°C	-15 ~ +24				

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 If the outdoor unit is installed higher than the indoor unit, max height is reduced to 10m.

*4 EER/COP, SEER/SCOP values and energy efficiency class are measured when connected to the indoor units listed below.

MXZ-2HA40VF MSZ-HR25VF + MSZ-HR25VF

MXZ-2HA50VF MSZ-HR25VF + MSZ-HR25VF

MXZ-3HA50VF MSZ-HR25VF + MSZ-HR25VF + MSZ-HR25VF

*5 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.

MXZ-DM SERIES

Multi-port outdoor units exclusively for MSZ-HJ and DM indoor units.



R410A

(2-port)

MXZ-2DM40VA



R410A

(3-port)

MXZ-3DM50VA

Stylish Design with Flat Panel Front


A stylish flat panel design is employed for the front of the indoor unit. The simple look matches room aesthetics.




Easy to create various combinations

Wide range of simple combinations only possible using multi-port outdoor units.


Two bedrooms

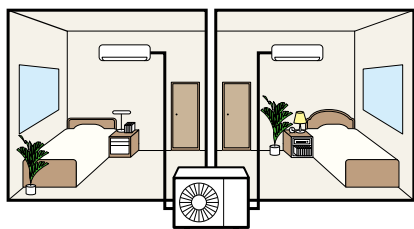


Three bedrooms

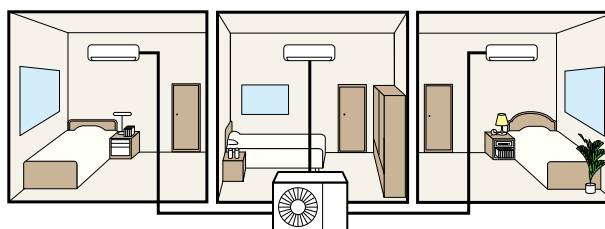

Living room and one bedroom

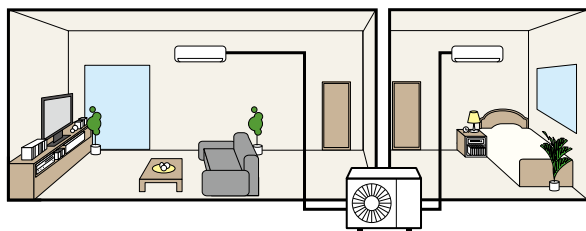

Wide living room

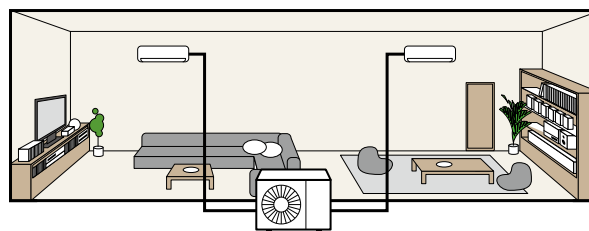


Attention MXZ-DM is exclusively for connection to MSZ-HJ and DM. Please check to make sure that wiring is done correctly.

For MXZ-DM

MSZ-HJ/DM


MXZ-2DM
MXZ-3DM

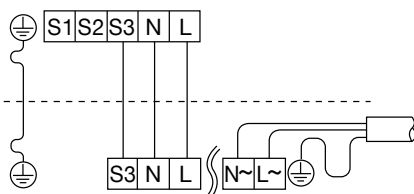

For MSZ-HJ/DM / MUZ-HJ/DM

MSZ-HJ/DM

MUZ-HJ/DM





Type (Inverter Multi - Split Heat Pump)				Up to 2 Indoor Units	Up to 3 Indoor Units
Indoor Unit				Please refer to (*4)	
Outdoor Unit				MXZ-2DM40VA	MXZ-3DM50VA
Refrigerant				R410A*1	
Power Supply				Outdoor power supply	
Source				230 / Single / 50	
Outdoor (V/Phase/Hz)					
Cooling	Capacity	Rated	kW	4.0	5.0
	Input*4	Rated	kW	1.05	1.13
	EER*4			3.81	4.42
	EEL Rank*4			A	A
	Design Load		kW	4.0	5.0
	Annual Electricity Consumption*2		kWh/a	226	283
	SEER*4, *5			6.1	6.1
	Energy Efficiency Class*4			A++	A++
	Capacity	Rated	kW	4.3	6.0
	Input	Rated	kW	1.16	1.31
Heating (Average Season)	COP*4			3.71	4.58
	EEL Rank*4			A	A
	Design Load		kW	3.2	4.0
	Declared Capacity	at reference design temperature	kW	2.73	3.34
		at bivalent temperature	kW	3.01	3.73
		at operation limit temperature	kW	2.27	2.70
	Back Up Heating Capacity		kW	0.47	0.66
	Annual Electricity Consumption*2		kWh/a	1105	1455
	SCOP*4, *5			4.0	3.8
	Energy Efficiency Class*4			A+	A
Operating Current (max)				12.2	18.0
Outdoor Unit	Dimensions	H x W x D	mm	550 - 800 (+69) - 285 (+59.5)	710 - 840 (+30) - 330 (+66)
	Weight		kg	32	57
	Air Volume	Cooling	m ³ /min	29.2	37.5
		Heating	m ³ /min	31.9	39.6
	Sound Level (SPL)	Cooling	dB(A)	48	50
		Heating	dB(A)	52	53
	Sound Level (PWL)	Cooling	dB(A)	63	64
	Operating Current	Cooling	A	5.1	5.0
		Heating	A	5.6	5.8
	Breaker Size		A	15	25
Ext. Piping	Port Diameter	Liquid / Gas	mm	6.35 x 2 / 9.52 x 2	6.35 x 3 / 9.52 x 3
	Total Piping Length (max)		m	30	50
	Each Indoor Unit Piping Length (max)		m	20	25
	Max. Height		m	15 (10)*3	15 (10)*3
	Chargeless Length		m	20	40
Guaranteed Operating Range [Outdoor]				-10 ~ +46	-15 ~ +24
				Cooling	°C
				Heating	°C

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 If the outdoor unit is installed higher than the indoor unit, max height is reduced to 10m.

*4 EER/COP, EEL rank, SEER/SCOP values and energy efficiency class are measured when connected to the indoor units listed below.

MXZ-2DM40VA, MSZ-DM25VA + MSZ-DM25VA

MXZ-3DM50VA, MSZ-DM25VA + MSZ-DM25VA + MSZ-DM25VA

*5 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.

PUMY-SP SERIES


Air conditioning system supports replacement work by simplifying the installation process. Ideal for supporting renewal needs at small offices and stores, home offices, etc.



R410A

PUMY-SP112/125/140VKM(-BS)
PUMY-SP112/125/140YKM(-BS)

EXAMPLE SYSTEM

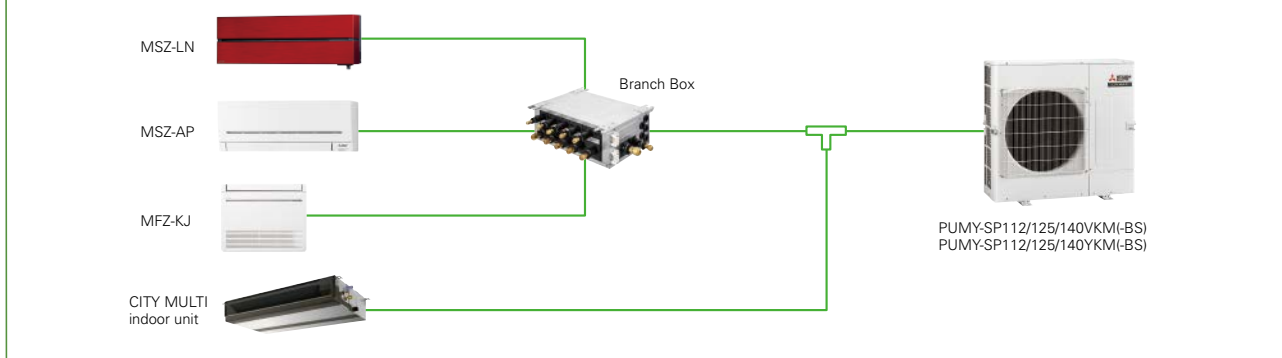

Light weight and compact size

Compact design fits into narrow outdoor unit space of condominiums and offices. Light weight design facilitates easy installation and transportation.



PUMY-P112/125/140YKM4(-BS)

Height 1,338mm
Weight 125kg




PUMY-SP112/125/140YKM(-BS)

Height 981mm **27% reduction**
Weight 94kg **25% reduction**


Unobstructive, compact, and easy to hide from view

Conventional 2-fan type outdoor units may spoil the view. Due to its compact size, the new outdoor fan unit can be installed in locations that would have been inappropriate.



Easy installation and transportation


The reduced weight and height allow for better transportation performance. Carrying and installing become easier.

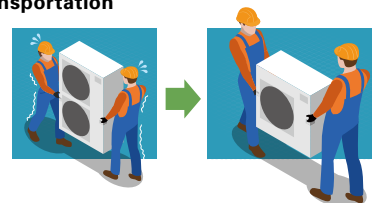

Industry's top energy efficiency*

Even with its compact size and light weight, it has a high EER and COP. Costs are reduced with the industry's best energy saving abilities.

* As of sep.2017.Among VRF outdoor unit of 1fan.
(An incompany investigation)

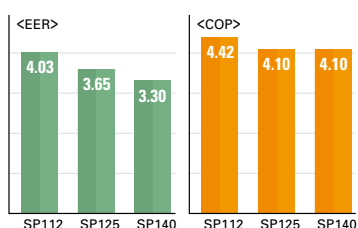

Super silent mode*

Noise level can be reduced up to 10dB(A). This allows you to operate the unit even in the night in a residential zone.

*Capacity reduction differs by mode setting.


*PAC-SC36NA-E is required to activate Super Silent mode.

Rear piping is available

Freedom with layout due to its piping pullout locations in four directions

The in-door unit allows piping from any four directions; front, back, bottom, or right. This enables easier horizontal connection for collective layout.



The out-door unit with an expanded piping layout flexibility greatly improves piping workability.



An external static pressure of 30Pa

The installation location is flexible, thanks to its 30Pa static pressure. You can install it in locations that you could not before.

An external static pressure of 30Pa allows outdoor unit to be installed on balconies in high-rise building or spaces near louvers.



*Noise level will increase when using this function.

Model			PUMY-SP112VKM(-BS)	PUMY-SP125VKM(-BS)	PUMY-SP140VKM(-BS)	PUMY-SP112YKM(-BS)	PUMY-SP125YKM(-BS)	PUMY-SP140YKM(-BS)		
Power Source			1-phase 220 - 230 - 240V 50Hz / 220V 60Hz			3-phase 380 - 400 - 415V 50Hz / 380V 60Hz				
Cooling Capacity (nominal)	*1		kW	12.5	14.0	15.5	12.5	14.0	15.5	
	Power Input		kW	3.10	3.84	4.70	3.10	3.84	4.70	
	Current Input		A	14.38 - 13.75 - 13.18 / 14.38	17.81 - 17.04 - 16.33 / 17.81	21.80 - 20.85 - 19.88 / 21.80	4.96 - 4.71 - 4.54 / 4.96	6.14 - 5.83 - 5.62 / 6.14	7.52 - 7.14 - 6.88 / 7.52	
	EER		kW/kW	4.03	3.65	3.30	4.03	3.65	3.30	
Temp. Range of Cooling*4	Indoor Temp.		W.B.	15.0 - +24.0°C	15.0 - +24.0°C	15.0 - +24.0°C	15.0 - +24.0°C	15.0 - +24.0°C	15.0 - +24.0°C	
	Outdoor Temp.		*3 D.B.	-5.0 - 52.0°C	-5.0 - 52.0°C	-5.0 - 52.0°C	-5.0 - 52.0°C	-5.0 - 52.0°C	-5.0 - 52.0°C	
Heating Capacity (nominal)	*2		kW	14.0	16.0	16.5	14.0	16.0	16.5	
	Power Input		kW	3.17	3.90	4.02	3.17	3.90	4.02	
	Current Input		A	14.70 - 14.06 - 13.48 / 14.70	18.09 - 17.30 - 16.58 / 18.09	18.65 - 17.83 - 17.09 / 18.65	5.07 - 4.82 - 4.64 / 5.07	6.24 - 5.93 - 5.71 / 6.24	6.43 - 6.11 - 5.89 / 6.43	
	COP		kW/kW	4.42	4.10	4.10	4.42	4.10	4.10	
Temp. Range of Heating	Indoor Temp.		D.B.	15.0 - 27.0°C	15.0 - 27.0°C	15.0 - 27.0°C	15.0 - 27.0°C	15.0 - 27.0°C	15.0 - 27.0°C	
	Outdoor Temp.		W.B.	-20.0 - +15.0°C	-20.0 - +15.0°C	-20.0 - +15.0°C	-20.0 - +15.0°C	-20.0 - +15.0°C	-20.0 - +15.0°C	
Indoor Unit Connectable	Total Capacity		50 to 130% of outdoor unit capacity							
	Model / Quantity		City Multi*10	10 - 140 / 9	10 - 140 / 10	10 - 140 / 12	10 - 140 / 9	10 - 140 / 10	10 - 140 / 12	
			Branch Box*9	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	
	Mixed System	Branch Box 1 unit	City Multi	10 - 140 / 5	10 - 140 / 5	10 - 140 / 5	10 - 140 / 5	10 - 140 / 5	10 - 140 / 5	
			Branch Box	15 - 100 / 5	15 - 100 / 5	15 - 100 / 5	15 - 100 / 5	15 - 100 / 5	15 - 100 / 5	
			Branch Box 2 units	City Multi	10 - 140 / 3 or 2*7	10 - 140 / 3	10 - 140 / 3	10 - 140 / 3 or 2*7	10 - 140 / 3	10 - 140 / 3
				Branch Box	15 - 100 / 7 or 8*7	15 - 100 / 8	15 - 100 / 8	15 - 100 / 7 or 8*7	15 - 100 / 8	15 - 100 / 8
Sound Pressure Level (Cooling / Heating)			dB <A>	52 / 54	53 / 56	54 / 56	52 / 54	53 / 56	54 / 56	
Sound Power Level (Cooling)			dB <A>	72	73	74	72	73	74	
Refrigerant Piping Diameter	Liquid Pipe		9.52 Flare							
	Gas Pipe		15.88 Flare							
Fan	Type x Quantity		Propeller Fan x 1							
	Air Flow Rate		m³/min	77	83	83	77	83	83	
			L/s	1,283	1,383	1,383	1,283	1,383	1,383	
			cfm	2,719	2,931	2,931	2,719	2,931	2,931	
	Motor Output		kW	0.20						
	External Static Press.		Pa	0 Pa / 30 Pa*8						
	Compressor	Type x Quantity		Twin rotary hermetic compressor x 1						
Starting Method		Inverter								
Motor Output		kW	3.1	3.5	3.7	3.1	3.5	3.7		
External Dimensions (H x W x D)			mm	981×1,050×330 (+40)						
Net Weight			kg (lbs)	93 (205)*5				94 (207)*6		
Pre-Charged Quantity	Weight		kg	3.5	3.5	3.5	3.5	3.5	3.5	
	CO2 Equivalent		t	7.31	7.31	7.31	7.31	7.31	7.31	
Max Added Quantity	Weight		kg	9.0	9.0	9.0	9.0	9.0	9.0	
	CO2 Equivalent		t	18.79	18.79	18.79	18.79	18.79	18.79	

*1, *2 Nominal conditions

	Indoor	Outdoor	Piping Length	Level Difference	External Static Press. (Outdoor Unit)
Cooling	27°C DB / 19°C WB	35°C	7.5m (24 - 9 / 16ft.)	0m (0ft)	0 Pa
Heating	20°C DB	7°C DB / 6°C WB	7.5m (24 - 9 / 16ft.)	0m (0ft)	0 Pa

*3 10 to 52°C; In case of connecting PKFY-P15/P20/P25VBM, PKFY-P10/15/20/25/32VLM, PFFY-P20/P25/P32VKM, PFFY-P20/25/32VCM, PFFY-P20/P25/P32VLE(R)IM indoor unit and M series indoor unit with connection kit and M series, S series, and P series type indoor unit with branch box.

*4 Up to 11 units when connecting via 2 branch boxes.

*5 94 (207), for PUMY-SP112/125/140VKM(-BS)

*6 95 (209), for PUMY-SP112/125/140YKM(-BS)

*7 When connecting 7 indoor units via branch box, connectable City Multi indoor units are 3; connecting 8 indoor units via branch box, connectable City Multi indoor units are 2.

*8 0 Pa as initial setting

*9 At least 2 indoor units must be connected when using branch box.

*10 It is possible to connect 1 Fresh Air type indoor unit to 1 outdoor unit. (1:1 system)

Type			Branch Box	
Model Name			PAC-MK54BC	PAC-MK34BC
Connectable Number of Indoor Units			Maximum 5	Maximum 3
Power Supply (from outdoor unit)			~ / N, 220 / 230 / 240 V, 50 Hz, ~ / N, 220 / 230 V, 60 Hz	
Input		kW	0.003	
Running Current		A	0.05 (Max. 6)	
Dimensions	H x W x D	mm	170 x 450 x 280	
Weight		kg	7.4	6.7
Piping Connection (Flare)	Branch [Indoor Side]	Liquid	mm	ø6.35 x 5
		Gas	mm	ø9.52 x 4, ø12.7 x 1
	Main [Outdoor Side]	Liquid	mm	ø9.52
		Gas	mm	ø15.88

* The piping connection size differs according to the type and capacity of outdoor/indoor units.
Match the piping connection size of branch box with outdoor/indoor unit. If the piping connection size of branch box does not match the piping connection size of outdoor/indoor unit, use optional different-diameter (deformed) joints to the branch box side.
(Connect deformed joint directly to the branch box side.)


<Branch box compatible table>

Outdoor unit	Branch box	PAC-MK31/51BC(B)	PAC-MK32/52BC(B)	PAC-MK33/53BC(B)	PAC-MK34/54BC
Outdoor unit 1fan	PUMY-SP112/125/140V/ YKM(-BS)	✓	N/A	N/A	N/A
	PUMY-SP112/125/140V/ YKMR1(-BS)	N/A	N/A	✓	✓
	PUMY-SP112/125/140V/ YKM(-BS)R2	N/A	N/A	✓	✓
Outdoor unit 2fan	PUMY-P112/125/140V/YKM4(-BS)	✓*	✓	✓	✓
	PUMY-P112/125/140V/YKM4R1(-BS)	✓*	✓	✓	✓
	PUMY-P112/125/140V/YKM5(-BS)	✓*	✓	✓	✓
	PUMY-P112/125/140V/YKM4(-BS)R2	✓*	✓	✓	✓
Outdoor unit 8HP	PUMY-P200YKM2(-BS)	✓	✓	✓	✓
	PUMY-P200YKM2R1(-BS)	✓	✓	✓	✓
	PUMY-P200YKM2(-BS)R2	✓	✓	✓	✓

*ecodan is NG

[SP112-140V/YKM(-BS)]

Refrigerant Piping Lengths	Maximum meters	Vertical differentials between units	Maximum meters
Total length	120	Indoor/outdoor (outdoor higher)	50
Maximum allowable length	To City Multi indoor unit: 70	Indoor/outdoor (outdoor lower)	30
	Through Branch box: 80	Indoor/indoor	15*

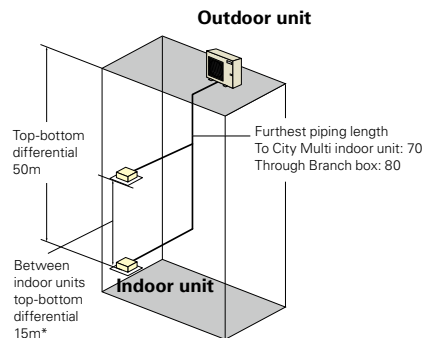

*In case of branch box connection: 12m

PUMY-P SERIES


Air conditioning system supports replacement work by simplifying the installation process. Ideal for supporting renewal needs at small offices and stores, home offices, etc.



R410A

PUMY-P112/125/140VKM5(-BS)
PUMY-P112/125/140YKM(E)4(-BS)
PUMY-P200YKM2(-BS)
PUMY-P250/300YBM(-BS)

EXAMPLE SYSTEM

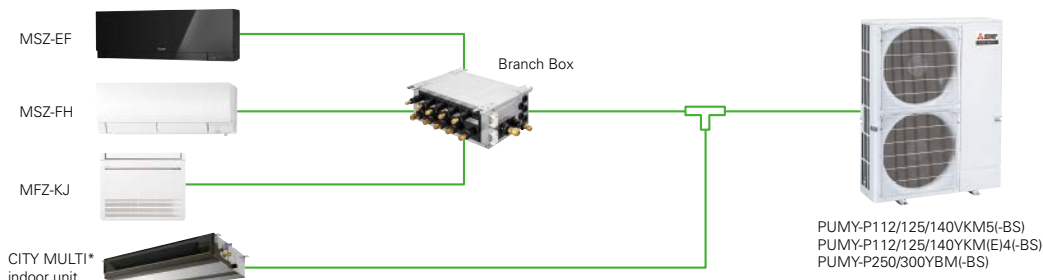


*In case of mix system (CITY MULTI indoor unit with Branch box), PKFY and PFFY series are not connectable. (P112/125/140/250/300)

The two-pipe zoned system designed for Heat Pump Operation


PUMY series make use of a two-pipe refrigerant system, which allows for system changeover from cooling to heating, ensuring that a constant indoor climate is maintained in all zones. The compact outdoor unit utilizes R410A refrigerant and an INVERTER-driven compressor to use energy effectively.

With a wide range of indoor unit line-up in connection with a flexible piping system, PUMY series can be configured for all applications. Up to 12 (P250/300: Up to 30) indoor units can be connected with up to 130% connected capacity to maximize engineer's design options. This feature allows easy air conditioning in each area with convenient individual controllers.

Small Offices

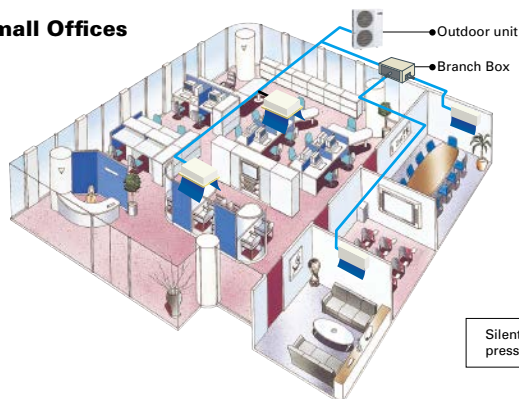

Residence

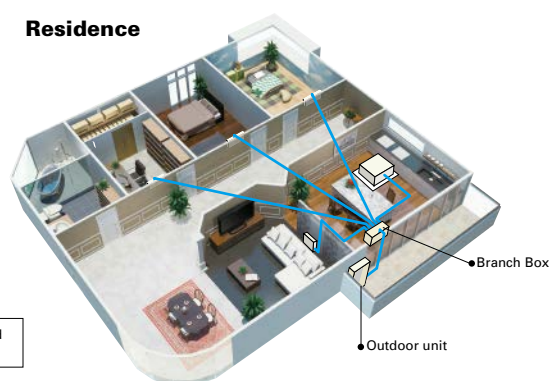

Silent mode can reduce sound pressure level by 3dB(A)

			Maximum Meters			
P112/125/140	Refrigerant Piping Length	Total Length	Only City Multi*1 Indoor Unit	Only Branch Box Connection	Mixed System (City Multi*1 Indoor Unit + Branch Box) City Multi*1 Indoor Unit	Via Branch Box
		Maximum Allowable Length	300	150	240 (2 Branch boxes) / 300 (1 Branch box)	80
P112/125/140	Vertical Differentials Between Units	Farthest Indoor From First Branch	150 (175 equivalent)	80	85 (95 equivalent)	80
		Piping Length Between Outdoor Unit and Branch Boxes	30	—	30	—
		Indoor/Outdoor (Outdoor higher)	—	55	—	55
	Vertical Differentials Between Units	Indoor/Outdoor (Outdoor Lower)	50	50	50	50
		Indoor/Outdoor (Outdoor Lower)	40*2	40	40	40
		Indoor/Indoor	15	12	12	12
P200	Refrigerant Piping Length	Total Length	150	150	150	150
		Maximum Allowable Length	80 (90 equivalent)	80	80 (90 equivalent)	80
		Farthest Indoor From First Branch	30	—	30	—
	Vertical Differentials Between Units	Piping Length Between Outdoor Unit and Branch Boxes	—	55	—	55
		Indoor/Outdoor (Outdoor higher)	50	50	50	50
		Indoor/Outdoor (Outdoor Lower)	40	40	40	40
P250/300	Refrigerant Piping Length	Indoor/Indoor	15	12	12	12
		Total Length	310	240	310	310
		Maximum Allowable Length	150 (175 equivalent)	80	85 (95 equivalent)	80
	Vertical Differentials Between Units	Farthest Indoor From First Branch	30	—	30	—
		Piping Length Between Outdoor Unit and Branch Boxes	—	95	—	95
		Indoor/Outdoor (Outdoor higher)	50	50	50	50
P250/300	Vertical Differentials Between Units	Indoor/Outdoor (Outdoor Lower)	40	40	40	40
		Indoor/Indoor	15	12	12	12


*1 Include system with connection kit *2 In case of including PKFY or PFFY, height between units is 30m.

30Pa external static pressure* Option (requires PAC-SJ71FM-E)

An external static pressure of 30Pa enables the outdoor unit to be installed on balconies in high-rise building or spaces near louvers.

* PUMY-P112/125/140VKM5(-BS), PUMY-P112/125/140YKM(E)4(-BS) only.
* Noise level will increase when using this function.

30Pa external static pressure fan motor (option)
(PAC-SJ71FM-E)





Model			PUMY-P112VKM5(-BS)			PUMY-P125VKM5(-BS)			PUMY-P140VKM5(-BS)			PUMY-P112YKM4(-BS)			PUMY-P125YKM4(-BS)			PUMY-P140YKM4(-BS)			PUMY-P200YKM2(-BS)			PUMY-P250YBM(-BS)			PUMY-P300YBM(-BS)		
Power Source			1-phase 220 - 230 - 240V 50Hz									3-phase 380 - 400 - 415V 50Hz																	
Cooling Capacity (nominal)	*1	kW	12.5	14.0	15.5	12.5	14.0	15.5	22.4	28.0	33.5																		
		Power Input	kW	2.79	3.46	4.52	2.79	3.46	4.52	6.05	8.21	10.12																	
		Current Input	A	12.87 - 12.32 - 11.80	15.97 - 15.27 - 14.64	20.86 - 19.95 - 19.12	4.99 - 4.74 - 4.57	5.84 - 5.55 - 5.35	7.23 - 6.87 - 6.62	9.88 - 9.39 - 9.05	13.35 - 12.68 - 12.22	16.36 - 15.54 - 14.98																	
		EER	kW/kW	4.48	4.05	3.43	4.48	4.05	3.43	3.70	3.41																		
Temp. Range of Cooling	*3	Indoor Temp.	W.B.	15.0 - 24.0°C	15.0 - 24.0°C	15.0 - 24.0°C	15.0 - 24.0°C	15.0 - 24.0°C	15.0 - 24.0°C	15.0 - 24.0°C	15.0 - 24.0°C	15.0 - 24.0°C	15.0 - 24.0°C	15.0 - 24.0°C															
		Outdoor Temp.*3	D.B.	-5.0 - 52.0°C	-5.0 - 52.0°C	-5.0 - 52.0°C	-5.0 - 52.0°C	-5.0 - 52.0°C	-5.0 - 52.0°C	-5.0 - 52.0°C	-5.0 - 52.0°C	-5.0 - 52.0°C																	
Heating Capacity (nominal)	*2	kW	14.0	16.0	18.0	14.0	16.0	18.0	25.0	31.5	37.5																		
		Power Input	kW	3.04	3.74	4.47	3.04	3.74	4.47	5.84	7.41	9.12																	
		Current Input	A	14.03 - 13.42 - 12.86	17.26 - 16.51 - 15.82	20.63 - 19.73 - 18.91	5.43 - 5.16 - 4.98	6.31 - 6.00 - 5.78	7.15 - 6.79 - 6.55	9.54 - 9.06 - 8.74	12.11 - 11.51 - 11.09	14.74 - 14.01 - 13.50																	
		COP	kW/kW	4.61	4.28	4.03	4.61	4.28	4.03	4.28	4.25	4.11																	
Temp. Range of Heating	*3	Indoor Temp.	D.B.	15.0 - 27.0°C	15.0 - 27.0°C	15.0 - 27.0°C	15.0 - 27.0°C	15.0 - 27.0°C	15.0 - 27.0°C	15.0 - 27.0°C	15.0 - 27.0°C	15.0 - 27.0°C	15.0 - 27.0°C																
		Outdoor Temp.	W.B.	-20.0 - 15.0°C	-20.0 - 15.0°C	-20.0 - 15.0°C	-20.0 - 15.0°C	-20.0 - 15.0°C	-20.0 - 15.0°C	-20.0 - 15.0°C	-20.0 - 15.0°C	-20.0 - 15.0°C																	
Indoor Unit Connectable	Total Capacity		50 to 130% of outdoor unit capacity																										
	Model / Quantity		City Multi*8	10 - 140 / 9	10 - 140 / 10	10 - 140 / 12	10 - 140 / 9	10 - 140 / 10	10 - 140 / 12	10 - 200 / 12	10 - 250 / 30	10 - 250 / 30																	
			Branch Box*5	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	15 - 50 / 12	15 - 50 / 12																	
	Mixed System	Branch Box 1 unit	City Multi	10 - 140 / 5	10 - 140 / 5	10 - 140 / 5	10 - 140 / 5	10 - 140 / 5	10 - 140 / 5	10 - 200 / 5	10 - 250 / 25	10 - 250 / 25																	
			Branch Box	15 - 100 / 5	15 - 100 / 5	15 - 100 / 5	15 - 100 / 5	15 - 100 / 5	15 - 100 / 5	15 - 100 / 5	15 - 50 / 5	15 - 50 / 5																	
		Branch Box 2 units	City Multi	10 - 140 / 3 or 2*4	10 - 140 / 3	10 - 140 / 3	10 - 140 / 3 or 2*4	10 - 140 / 3	10 - 140 / 3	10 - 200 / 3	10 - 250 / 23	10 - 250 / 23																	
			Branch Box	15 - 100 / 7 or 8*4	15 - 100 / 8	15 - 100 / 8	15 - 100 / 7 or 8*4	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	15 - 50 / 10	15 - 50 / 10																	
Branch Box 3 units		City Multi	-	-	-	-	-	-	-	10 - 250 / 22	10 - 250 / 22																		
	Branch Box	-	-	-	-	-	-	-	15 - 50 / 12	15 - 50 / 12																			
Sound Pressure Level (measured in anechoic room)			dB <A>	49 / 51	50 / 52	51 / 53	49 / 51	50 / 52	51 / 53	56 / 61	55 / 61	57 / 62																	
Refrigerant Piping Diameter	Liquid Pipe		mm	9.52 Flare						9.52*6 Flare			9.52*7 Flare			12.7 Flare													
	Gas Pipe		mm	15.88 Flare						19.1 Flare			22.4 Flare			25.4 Flare													
Fan	Type x Quantity		Propeller Fan x 2																										
	Air Flow Rate	m³/min	110						139			165 / 183			165 / 183														
		L/s	1,883						2,316			2,750 / 3,050			2,750 / 3,050														
		cfm	3,884						4,908			5,826 / 6,462			5,826 / 6,462														
Motor Output		kW	0.074 + 0.074						0.20 + 0.20			0.375 x 2			0.375 x 2														
Compressor	Type x Quantity		Scroll hermetic compressor x 1																										
	Starting Method		Inverter																										
	Motor Output		kW	2.9	3.5	3.9	2.9	3.5	3.9	5.3	5.7	6.9																	
External Dimensions (H x W x D)			mm	1,338 x 1,050 x 330 (+40)												1,662 x 1,050 x 460 (+45)													
Weight			kg	123			125			141			196 (198)			196 (198)													

*1, *2 Nominal conditions

	Indoor	Outdoor	Piping Length	Level Difference
Cooling	27°C DB / 19°C WB	35°C	7.5m	0m
Heating	20°C DB	7°C DB / 6°C WB	7.5m	0m

*3 10 to 52°C D.B.: When connecting PKFY-P10/15/20/25/32VLM, PKFY-P15/20/25VBM, PFFY-P20/25/32VKM and PFFY-P20/25/32VCM, PFFY-P20/25/32VLE(R)M, PFFY-P-VMA3, M, S and P series indoor unit.

*4 When connecting 7 indoor units via branch box, connectable City Multi indoor units are 3; connecting 8 indoor units via branch box, connectable indoor units are 2.

*5 At least 2 indoor units must be connected when using branch box.

*6 Liquid pipe diameter: 12.7mm when piping length is more than 60m.

*7 Liquid pipe diameter: 12.7mm, when further piping length is longer than 90m, and when PFFY-P200 or P250 is connected.

*8 It is possible to connect 1 Fresh Air type indoor unit to 1 outdoor unit. (1:1 system)

Model			PUMY-P112YKME4(-BS)		PUMY-P125YKME4(-BS)		PUMY-P140YKME4(-BS)	
Power Source			3-phase 380 - 400 - 415V 50Hz					
Cooling Capacity (nominal)	*1		kW		12.5		14.0	
	Power Input		kW		2.79		3.46	
	Current Input		A		4.99 / 4.74 / 4.57		5.84 / 5.55 / 5.35	
	EER		kW/kW		4.48		4.05	
Temp. Range of Cooling	Indoor Temp.		W.B.		15 to 24°C			
	Outdoor Temp.*3		D.B.		-5 to 52°C			
Heating Capacity (nominal)	*2		kW		14.0		16.0	
	Power Input		kW		3.04		3.74	
	Current Input		A		5.43 / 5.16 / 4.98		6.31 / 6.00 / 5.78	
	COP		kW/kW		4.61		4.28	
Temp. Range of Heating	Indoor Temp.		D.B.		15 to 27°C			
	Outdoor Temp.		W.B.		-20 to 15°C			
Indoor Unit Connectable	Total Capacity		50 to 130% of outdoor unit capacity					
	Model / Quantity		City Multi*6		10 - 140 / 9		10 - 140 / 10	
			Branch Box*5		15 - 100 / 8		15 - 100 / 8	
	Mixed System	Branch Box 1 unit	City Multi		10 - 140 / 5		10 - 140 / 5	
			Branch Box		15 - 100 / 5		15 - 100 / 5	
			City Multi		10 - 140 / 3 or 2*4		10 - 140 / 3	
			Branch Box		15 - 100 / 7 or 8*4		15 - 100 / 8	
Branch Box 2 units		City Multi		10 - 140 / 3 or 2*4		10 - 140 / 3		
		Branch Box		15 - 100 / 7 or 8*4		15 - 100 / 8		
Sound Pressure Level (measured in anechoic room)			dB <A>		49 / 51		50 / 52	
							51 / 53	
Refrigerant Piping Diameter	Liquid Pipe		mm		9.52 Flare			
	Gas Pipe		mm		15.88 Flare			
Fan	Type x Quantity		Propeller Fan x 2					
	Air Flow Rate		m³/min		110			
			L/s		1,833			
			cfm		3,884			
Motor Output		kW		0.074 + 0.074				
Compressor	Type x Quantity		Scroll hermetic compressor x 1					
	Starting Method		Inverter					
	Motor Output		kW		2.9		3.5	
External Dimensions (H x W x D)			mm		1,338×1,050×330 (+40)			
Weight			kg		136			

*1, *2 Nominal conditions

	Indoor	Outdoor	Piping Length	Level Difference
Cooling	27°C DB / 19°C WB	35°C	7.5m	0m
Heating	20°C DB	7°C DB / 6°C WB	7.5m	0m

*3 10 to 52°C D.B.: When connecting PKFY-P15/20/25VBM, PFFY-P20/25/32VKM and PFFY-P20/25/32VLE(R)M, PFFY-P-VMA3, M, S and P series indoor unit.

*4 When connecting 7 indoor units via branch box, connectable City Multi indoor units are 3; connecting 8 indoor units via branch box, connectable indoor units are 2.

*5 At least 2 indoor units must be connected when using branch box.

*6 It is possible to connect 1 Fresh Air type indoor unit to 1 outdoor unit. (1:1 system)

Type			Branch Box	
Model Name			PAC-MK54BC	PAC-MK34BC
Connectable Number of Indoor Units			Maximum 5	Maximum 3
Power Supply (from outdoor unit)			~ / N, 220 / 230 / 240 V, 50 Hz, ~ / N, 220 / 230 V, 60 Hz	
Input			kW	
Running Current			A	
Dimensions			mm	
Weight			kg	
Piping Connection (Flare)	Branch [Indoor Side]	Liquid	mm	ø6.35 x 5
		Gas	mm	ø9.52 x 4, ø12.7 x 1
	Main [Outdoor Side]	Liquid	mm	ø9.52
		Gas	mm	ø15.88

* The piping connection size differs according to the type and capacity of outdoor/indoor units.
Match the piping connection size of branch box with outdoor/indoor unit.
If the piping connection size of branch box does not match the piping connection size of outdoor/indoor unit, use optional different-diameter (deformed) joints to the branch box side.
(Connect deformed joint directly to the branch box side.)

Indoor Unit Compatibility Table

■ MXZ Series R32

Possible combinations of outdoor units and indoor units are shown below.

Indoor Unit			Outdoor Unit		Inverter Models Heat pump type													
					MXZ- ¹ 3 2F33VF3	MXZ- ¹ 3 2F42VF3	MXZ- ¹ 3 2F53VF(H)3	MXZ- ¹ 3 2F53VFHZ	MXZ- ¹ 3 3F54VF3	MXZ- ¹ 3 3F68VF3	MXZ- ¹ 3 4F72VF3	MXZ- ¹ 3 4F80VF3	MXZ- ¹ 3 4F83VF	MXZ- ¹ 3 4F83VFHZ	MXZ- ¹ 3 5F102VF	MXZ- ¹ 3 6F122VF	MXZ- ¹ 3 2HA40VF	MXZ- ¹ 3 2HA50VF
M series	Wall-Mounted	MSZ-RW25VG	●	●	●	●	●	●	●	●	●	●	●	●				
		MSZ-RW35VG		●	●	●	●	●	●	●	●	●	●	●				
		MSZ-RW50VG					●	●			●	●	●	●				
		MSZ-LN18VG2(W)(V)(R)(B)	●	●	●	●	●	●	●	●	●	●	●	●				
		MSZ-LN25VG2(W)(V)(R)(B)	●	●	●	●	●	●	●	●	●	●	●	●				
		MSZ-LN35VG2(W)(V)(R)(B)		●	●	●	●	●	●		●	●	●	●				
		MSZ-LN50VG2(W)(V)(R)(B)					●	●	●	●		●	●	●				
		MSZ-FT25VG				●						●						
		MSZ-FT35VG				●						●						
		MSZ-FT50VG																
		MSZ-AP15VG(K)	●	●	●	●	●	●	●	●	●	●	●	●	●			
		MSZ-AP20VG(K)	●	●	●	●	●	●	●	●	●	●	●	●	●			
		MSZ-AP25VG(K)	●	●	●	●	●	●	●	●	●	●	●	●	●			
		MSZ-AP35VG(K)		●	●	●	●	●	●	●	●	●	●	●	●			
		MSZ-AP42VG(K)			●	●	●	●	●	●	●	●	●	●	●			
		MSZ-AP50VG(K)			●	●	●	●	●	●	●	●	●	●	●			
		MSZ-AP60VG(K)						●	●	●	●	●	●	●	●			
		MSZ-AP71VG(K)									●	●	●	●	●			
		MSZ-EF18VG(K)(W)(B)(S)	●	●	●	●	●	●	●	●	●	●	●	●	●			
		MSZ-EF22VG(K)(W)(B)(S)	●	●	●	●	●	●	●	●	●	●	●	●	●			
		MSZ-EF25VG(K)(W)(B)(S)	●	●	●	●	●	●	●	●	●	●	●	●	●			
		MSZ-EF35VG(K)(W)(B)(S)		●	●	●	●	●	●	●	●	●	●	●	●			
		MSZ-EF42VG(K)(W)(B)(S)			●	●	●	●	●	●	●	●	●	●	●			
		MSZ-EF50VG(K)(W)(B)(S)			●	●	●	●	●	●	●	●	●	●	●			
		MSZ-BT20VG(K)	●	●			●	●	●	●	●	●	●	●	●			
		MSZ-BT25VG(K)	●	●	●	●	●	●	●	●	●	●	●	●	●			
		MSZ-BT35VG(K)		●	●	●	●	●	●	●	●	●	●	●	●			
		MSZ-BT50VG(K)																
		MSZ-HR25VF(K)														●	●	●
		MSZ-HR35VF(K)														●	●	●
		MSZ-HR42VF(K)															●	●
		MSZ-HR50VF(K)																●
		MSZ-HR60VF(K)																
		MSZ-HR71VF(K)																
		MSZ-DW25VF														●	●	●
		MSZ-DW35VF														●	●	●
		MSZ-DW50VF																
	Floor-Standing	MFZ-KT25VG	●	●	●	●	●	●	●	●	●	●	●	●				
		MFZ-KT35VG		●	●	●	●	●	●	●	●	●	●	●				
		MFZ-KT50VG					●	●	●	●	●	●	●	●				
		1-way Cassette	MLZ-KP25VF	●	●	●	●	●	●	●	●	●	●	●				
		MLZ-KP35VF		●	●	●	●	●	●	●	●	●	●	●				
	MLZ-KP50VF					●	●	●	●	●	●	●	●					
S series	2x2 Cassette	SLZ-M15FA2	●	●	●	●	●	●	●	●	●	●	●	●				
		SLZ-M25FA2	●	●	●	●	●	●	●	●	●	●	●	●				
		SLZ-M35FA2		●	●	●	●	●	●	●	●	●	●	●				
		SLZ-M50FA2					●	●	●	●	●	●	●	●				
	Ceiling- Concealed	SEZ-M25DA2 ²	●	●	●	●	●	●	●	●	●	●	●	●				
		SEZ-M25DAL2 ²	●	●	●	●	●	●	●	●	●	●	●	●				
		SEZ-M35DA2		●	●	●	●	●	●	●	●	●	●	●				
		SEZ-M35DAL2		●	●	●	●	●	●	●	●	●	●	●				
		SEZ-M50DA2					●	●	●	●	●	●	●	●				
		SEZ-M50DAL2					●	●	●	●	●	●	●	●				
		SEZ-M60DA2						●	●	●	●	●	●	●				
		SEZ-M60DAL2						●	●	●	●	●	●	●				
		SEZ-M71DA2								●	●	●	●	●				
SEZ-M71DAL2									●	●	●	●						
P series	Ceiling- Suspended	PCA-M50KA2					●	●	●	●								
		PCA-M60KA2						●	●	●								
		PCA-M71KA2																
	Ceiling- Concealed	PEAD-M50JA2					● ¹	● ¹	● ¹	● ¹								
		PEAD-M50JAL2					● ¹	● ¹	● ¹	● ¹								
		PEAD-M60JA2																
		PEAD-M60JAL2																
		PEAD-M71JA2																
PEAD-M71JAL2																		

*1 Maximum total current of indoor units: 3A or less.

*2 SEZ-M25 cannot be connected with MXZ-2F/3F/4F when total capacity of connected indoor units is equivalent to outdoor capacity (capacity ratio is 1).

*3 MXZ outdoor units are not designed to operate with a single indoor unit with one-to-one piping work. Please install at least two indoor units.

MXZ Series R410A

Possible combinations of outdoor units and indoor units are shown below.

Indoor Unit			Outdoor Unit	Inverter Models Heat pump type												
			MXZ- ^{*3} 2D33VA	MXZ- ^{*3} 2D42VA2	MXZ- ^{*3} 2D53VA(H)2	MXZ- ^{*3} 2E53VAHZ	MXZ- ^{*3} 3E54VA	MXZ- ^{*3} 3E68VA	MXZ- ^{*3} 4E72VA	MXZ- ^{*3} 4E83VA	MXZ- ^{*3} 4E83VAHZ	MXZ- ^{*3} 5E102VA	MXZ- ^{*3} 6D122VA2	MXZ- ^{*3} 2DM40VA	MXZ- ^{*3} 3DM50VA	
M series	Wall-Mounted	MSZ-LN18VG(W)(V)(R)(B)														
		MSZ-LN25VG(W)(V)(R)(B)	●	●	●	●	●	●	●	●	●	●	●			
		MSZ-LN35VG(W)(V)(R)(B)		●	●	●	●	●	●	●	●	●	●			
		MSZ-LN50VG(W)(V)(R)(B)														
		MSZ-AP15VG ^{*7}	●	●	●	●	●	●	●	●	●	●	●			
		MSZ-AP20VG ^{*7}	●	●	●	●	●	●	●	●	●	●	●			
		MSZ-AP25VG ^{*7}	●	●	●	●	●	●	●	●	●	●	●			
		MSZ-AP35VG ^{*7}		●	●	●	●	●	●	●	●	●	●			
		MSZ-AP42VG ^{*7}			●	●	●	●	●	●	●	●	●			
		MSZ-AP50VG ^{*7}			●	●	●	●	●	●	●	●	●			
		MSZ-EF18VG(W)(B)(S)	●	●	●	●	●	●	●	●	●	●	●			
		MSZ-EF22VG(W)(B)(S)	●	●	●	●	●	●	●	●	●	●	●			
		MSZ-EF25VG(W)(B)(S)	●	●	●	●	●	●	●	●	●	●	●			
		MSZ-EF35VG(W)(B)(S)		●	●	●	●	●	●	●	●	●	●			
		MSZ-EF42VG(W)(B)(S)			●	●	●	●	●	●	●	●	●			
		MSZ-EF50VG(W)(B)(S)			●	●	●	●	●	●	●	●	●			
		MSZ-FH25VE2	●	●	●	●	●	●	●	●	●	●	●			
		MSZ-FH35VE2		●	●	●	●	●	●	●	●	●	●			
		MSZ-FH50VE2					●	●	●	●	●	●	●			
		MSZ-SF15VA	●	●	●	●	●	●	●	●	●	●	●			
		MSZ-SF20VA	●	●	●	●	●	●	●	●	●	●	●			
		MSZ-SF25VE3	●	●	●	●	●	●	●	●	●	●	●			
		MSZ-SF35VE3		●	●	●	●	●	●	●	●	●	●			
		MSZ-SF42VE3			●	●	●	●	●	●	●	●	●			
		MSZ-SF50VE3			●	●	●	●	●	●	●	●	●			
		MSZ-GF60VE2						●	●	●	●	●	●			
		MSZ-GF71VE2							●	●	●	●	●			
		MSZ-DM25VA												●	●	
	MSZ-DM35VA												●	●		
	MSZ-HJ25VA												●	●		
	MSZ-HJ35VA												●	●		
	MSZ-HJ50VA													●		
	Floor-Standing	MFZ-KJ25VE2	● ^{*4*5}	● ^{*4}	● ^{*4}	●	● ^{*4}	● ^{*4}	●	●	●	●	●			
		MFZ-KJ35VE2		● ^{*4}	● ^{*4}	●	● ^{*4}	● ^{*4}	●	●	●	●	●			
		MFZ-KJ50VE2					● ^{*4}	● ^{*4}	●	●	●	●	●			
		MLZ-KP25VF	●	●	●	●	●	●	●	●	●	●	●			
		MLZ-KP35VF		●	●	●	●	●	●	●	●	●	●			
1-way Cassette	MLZ-KP50VF					●	●	●	●	●	●	●				
	SLZ-M15FA															
	SLZ-M25FA	●	●	●	●	●	●	●	●	●	●	●				
2x2 Cassette	SLZ-M35FA		●	●	●	●	●	●	●	●	●	●				
	SLZ-M50FA					●	●	●	●	●	●	●				
	SEZ-M25DA ^{*2}	●	●	●	●	●	●	●	●	●	●	●				
	SEZ-M25DAL ^{*2}	●	●	●	●	●	●	●	●	●	●	●				
	SEZ-M35DA		●	●	●	●	●	●	●	●	●	●				
	SEZ-M35DAL		●	●	●	●	●	●	●	●	●	●				
	SEZ-M50DA					●	●	●	●	●	●	●				
	SEZ-M50DAL					●	●	●	●	●	●	●				
	SEZ-M60DA						●	●	●	●	●	●				
	SEZ-M60DAL						●	●	●	●	●	●				
	SEZ-M71DA								●	●	●	●				
	SEZ-M71DAL								●	●	●	●				
	S series	Ceiling-Concealed	PLA-M50EA					●	●	●	●	●	●	●		
			PLA-M60EA						●	●	●	● ^{*6}	●	●		
PLA-M71EA									●	●	● ^{*6}	●	●			
Ceiling-Suspended		PCA-M50KA					●	●	●	●	● ^{*6}	●	●			
		PCA-M60KA						●	●	●	● ^{*6}	●	●			
		PCA-M71KA							●	●	● ^{*6}	●	●			
Ceiling-Concealed		PEAD-M50JA					● ^{*1}	● ^{*1}	● ^{*1}	● ^{*1}	● ^{*1*6}	● ^{*1}	● ^{*1}			
		PEAD-M50JAL					● ^{*1}	● ^{*1}	● ^{*1}	● ^{*1}	● ^{*1*6}	● ^{*1}	● ^{*1}			
		PEAD-M60JA								● ^{*1}	● ^{*1*6}	● ^{*1}	● ^{*1}			
		PEAD-M60JAL								● ^{*1}	● ^{*1*6}	● ^{*1}	● ^{*1}			
		PEAD-M71JA								● ^{*1}	● ^{*1*6}	● ^{*1}	● ^{*1}			
		PEAD-M71JAL								● ^{*1}	● ^{*1*6}	● ^{*1}	● ^{*1}			

^{*1} Maximum total current of indoor units: 3A or less.

^{*2} SEZ-KD25 cannot be connected with MXZ-2D(E)/3E/4E/5E when total capacity of connected indoor units is equivalent to outdoor capacity (capacity ratio is 1).

^{*3} MXZ outdoor units are not designed to operate with a single indoor unit with one-to-one piping work. Please install at least two indoor units.

^{*4} When connecting the MFZ-KJ Series indoor unit, additional refrigerant is required. For details, please refer to page 106.

^{*5} Regarding MXZ-2D33, the second unit should be a different type in the case of selecting one MFZ-KJ.

^{*6} P series cannot be connected with MXZ-4E83VAHZ when ampere limit adjustment function is operated.

^{*7} Connectable outdoor unit are MXZ-2D33VA-E4, MXZ-2D42VA2-E4, MXZ-2D53VA2-E4, MXZ-2E53VAHZ-E2, MXZ-3E54VA-E2, MXZ-3E68VA-E2, MXZ-4E72VA-E2, MXZ-4E83VA-E4, MXZ-4E83VAHZ-E3, MXZ-5E102VA-E4.

■ PUMY-SP Series

Branch Box Connection Compatibility Table

Series	Type	Model Name	Capacity										
			15	18	20	22	25	35	42	50	60	71	100
M series	Wall-Mounted	MSZ-LN•VG2					●	●		●			
		MSZ-AP•VG(K)	●*1		●*1		●*1	●*1	●*1	●*1			
		MSZ-FH•VE2					●	●		●			
		MSZ-EF•VG(K)		●*1		●*1	●*1	●*1	●*1	●*1			
		MSZ-SF•VA	●		●								
		MSZ-SF•VE3					●	●	●	●			
		MSZ-GF•VE2									●	●	
S series	Floor-Standing	MFZ-KT•VG					●*1	●*1		●*1			
	1-way Cassette	MLZ-KP•VF					●*1	●*1		●*1			
	2x2 Cassette	SLZ-M•FA	●*1				●*1	●*1		●*1	●*1	●*1	
P series	Ceiling-Concealed	SEZ-M•DA(L)					●*1	●*1		●*1	●*1	●*1	
	4-way Cassette	PLA-M•EA						●*1		●*1	●*1	●*1	●*1
	Ceiling-Concealed	PEAD-M•JA(L)								●*1	●*1	●*1	●*1

*1 Connectable outdoor units are PUMY-SP112/125/140V(Y)KMR1(R2)(-BS).TH only.

LEV Kit Connection Compatibility Table

Series	I/U Type	Model Name	Capacity									
			15	18	20	22	25	35	42	50	60	71
M series	Wall-Mounted	MSZ-LN•VG2					●*1	●*1		●*1		
		MSZ-AP•VG(K)	●*1		●*1		●*1	●*1	●*1	●*1		
		MSZ-FH•VE2					●	●		●		
		MSZ-EF•VG(K)		●*1		●*1	●*1	●*1	●*1	●*1		
		MSZ-SF•VA	●		●							
		MSZ-SF•VE3					●	●	●	●		
	Floor-Standing	MFZ-KT•VG					●*1	●*1		●*1		

*1 Connectable outdoor units are PUMY-SP112/125/140V(Y)KMR1(R2)(-BS).TH only.

CITY MULTI Indoor Unit Compatibility Table for PUMY-SP112/125/140

Series	Type	Model Name	Capacity													
			P10	P15	P20	P25	P32	P40	P50	P63	P71	P80	P100	P125	P140	P200
CITY MULTI series	1-way cassette	PMFY-P•VBM-E			●	●	●	●	●	●						
	2-way cassette	PLFY-P•VLMD-E			●	●	●	●	●	●		●	●	●		
	4-way cassette	PLFY-M•VEM-E			●	●	●	●	●	●		●	●	●		
		PLFY-EP•VEM-E *3							●	●		●				
		PLFY-P•VFM-E		●	●	●	●	●	●							
	Ceiling-concealed	PEFY-P•VMR-E-L/R			●	●	●	●								
		PEFY-P•VMS1(L)-E		●	●	●	●	●	●	●						
		PEFY-M•VMA(L)-A			●	●	●	●	●	●	●	●	●	●	●	
		PEFY-P•VMA3-E*1				●	●	●								
		PEFY-P•VMHS-E						●	●	●	●	●	●	●	●	
		PEFY-P•VMHS-E-F *4												●		
	Ceiling-suspended	PCFY-P•VKM-E						●		●			●	●		
	Wall-mounted	PKFY-P•VLM-E	●	●	●	●	●	●	●							
		PKFY-P•VKM-E								●			●			
	Floor-standing	PFFY-P•VKM-E2			●	●	●	●	●							
		PFFY-P•VLEM-E			●	●	●	●	●	●						
		PFFY-P•VCM-E			●	●	●	●	●	●						
	Lossnay *2		GUF-50/100RD(H)4													

*1 Authorized connectable indoor units are as follows;

PUMY-SP112: PEFY-P25x2+P32x2, PUMY-SP125: PEFY-P25x1+P32x3, PUMY-SP140: PEFY-P32x2+P40x2

*2 Do not connect Lossnay remote controller(s). (PZ-61DR-E, PZ-60DR-E, PZ-52SF-E, PZ-43SMF-E)

*3 PLFY-EP can not connect more than 3 units

*4 Connectable outdoor units are PUMY-SP112/125/140V(Y)KMR2(-BS). TH only.

■ PUMY-P Series

Branch Box Connection Compatibility Table

Series	Type	Model Name	Capacity										
			15	18	20	22	25	35	42	50	60	71	100
M series	Wall-Mounted	MSZ-LN•VG2					●	●		●			
		MSZ-AP•VG(K)	●*1		●*1		●	●	●	●			
		MSZ-FH•VE2					●	●		●			
		MSZ-EF•VG(K)		●		●	●	●	●	●			
		MSZ-SF•VA	●		●								
		MSZ-SF•VE3					●	●	●	●			
		MSZ-GF•VE2									●	●	
	Floor-Standing	MFZ-KT•VG					●	●		●			
	1-way Cassette	MLZ-KP•VF					●	●		●			
S series	Ceiling-Concealed	SEZ-M•DA(L)					●	●		●	●	●	
	2x2 Cassette	SLZ-M•FA	●				●	●		●	●	●	
P series	Ceiling-Suspended	PCA-M•KA						●		●	●	●	●
	4-way Cassette	PLA-M•EA						●		●	●	●	●
	Ceiling-Concealed	PEAD-M•JA(L)								●	●	●	●

*1 MSZ-AP15/20VGK are not connectable.

LEV Kit Connection Compatibility Table

Series	I/U Type	Model Name	Capacity							
			15	18	20	22	25	35	42	50
M series	Wall-Mounted	MSZ-LN•VG2					●	●		●
		MSZ-AP•VG(K)	●*1		●*1		●	●	●	●
		MSZ-FH•VE2					●	●		●
		MSZ-EF•VG(K)		●		●	●	●	●	●
		MSZ-SF•VA	●		●					
		MSZ-SF•VE3					●	●	●	●
	Floor-Standing	MFZ-KT•VG					●	●		●

*1 MSZ-AP15/20VGK are not connectable.

CITY MULTI Indoor Unit Compatibility Table for PUMY-P112/125/140

Series	Type	Model Name	Capacity													
			P10	P15	P20	P25	P32	P40	P50	P63	P71	P80	P100	P125	P140	P200
CITY MULTI series	1-way cassette	PMFY-P•VBM-E			●	●	●	●	●	●						
	2-way cassette	PLFY-P•VLMD-E			●	●	●	●	●	●		●	●	●		
	4-way cassette	PLFY-M•VEM-E			●	●	●	●	●	●		●	●	●		
		PLFY-EP•VEM-E *4							●	●		●				
		PLFY-P•VFM-E		●	●	●	●	●	●	●						
	Ceiling-concealed	PEFY-P•VMR-E-L/R			●	●	●	●	●	●						
		PEFY-P•VMS1(L)-E		●	●	●	●	●	●	●						
		PEFY-M•VMA(L)-A			●	●	●	●	●	●	●	●	●	●	●	
		PEFY-P•VMA3-E *1				●	●	●	●	●						
		PEFY-P•VMHS-E						●	●	●	●	●	●	●	●	
		PEFY-P•VMHS-E-F												●		
	Ceiling-suspended	PCFY-P•VKM-E						●		●			●	●		
	Wall-mounted	PKFY-P•VLM-E	●	●	●	●	●	●	●	●						
		PKFY-P•VKM-E								●			●			
	Floor-standing	PFFY-P•VKM-E2			●	●	●	●	●							
		PFFY-P•VLEM-E			●	●	●	●	●	●						
		PFFY-P•VCM-E			●	●	●	●	●	●						
	ATW	PWFY-P•VM-E1 *2											●			
	Lossnay		GUF-50/100RD(H)4													

CITY MULTI Indoor Unit Compatibility Table for PUMY-P200

Series	Type	Model Name	Capacity													
			P10	P15	P20	P25	P32	P40	P50	P63	P71	P80	P100	P125	P140	P200
CITY MULTI series	1-way cassette	PMFY-P•VBM-E			●	●	●	●	●	●						
	2-way cassette	PLFY-P•VLMD-E			●	●	●	●	●	●		●	●	●		
	4-way cassette	PLFY-M•VEM-E			●	●	●	●	●	●		●	●	●		
		PLFY-EP•VEM-E *4								●						
		PLFY-P•VFM-E		●	●	●	●	●	●	●						
	Ceiling-concealed	PEFY-P•VMR-E-L/R			●	●	●	●	●	●						
		PEFY-P•VMS1(L)-E		●	●	●	●	●	●	●						
		PEFY-M•VMA(L)-A			●	●	●	●	●	●	●	●	●	●	●	
		PEFY-P•VMA3-E *1						●	●	●						
		PEFY-P•VMHS-E						●	●	●	●	●	●	●	●	●
		PEFY-P•VMHS-E-F														●
	Ceiling-suspended	PCFY-P•VKM-E						●		●			●	●		
	Wall-mounted	PKFY-P•VLM-E	●	●	●	●	●	●	●	●						
		PKFY-P•VKM-E								●			●			
	Floor-standing	PFFY-P•VKM-E2			●	●	●	●	●							
		PFFY-P•VLEM-E			●	●	●	●	●	●						
		PFFY-P•VCM-E			●	●	●	●	●	●						
	Lossnay *3		GUF-50/100RD(H)4													

*1 Authorized connectable indoor units are as follows;

PUMY-P112: PEFY-P25×2+P32×2, PUMY-P125: PEFY-P32×4, PUMY-P140: PEFY-P32×3+P40×1, PUMY-P200YKM2: PEFY-P40×2+P63×2

*2 Note that connection is not allowed inside EU countries and UK.

PWFY can not connect to PUMY-P200YKM2.

*3 Do not connect Lossnay remote controller(s). (PZ-61DR-E, PZ-60DR-E, PZ-52SF-E, PZ-43SMF-E)

*4 PUMY-P112/125/140: PEFY-EP can not connect more than 3 units

PUMY-P200: Authorized connectable indoor units are only as follows; PLFY-EP63VEM-E×3.

■ PUMY-P250/300 Series

Branch Box/LEV Kit Connection Compatibility Table

Series	I/U Type	Model Name	Capacity							
			15	18	20	22	25	35	42	50
M series	Wall-Mounted	MSZ-LN•VG2					●	●		●
		MSZ-AP•VG(K)	●		●		●	●	●	
		MSZ-FH•VE2					●	●		●
		MSZ-EF•VG(K)		●		●	●	●	●	
	Floor-Standing	MFZ-KT•VG					●	●		●

CUTY MULTI Indoor Unit Compatibility Table

Series	Type	Model Name	Capacity														
			P10	P15	P20	P25	P32	P40	P50	P63	P71	P80	P100	P125	P140	P200	P250
CITY MULTI series	1-way cassette	PMFY-P•VBM-E			●	●	●	●									
	2-way cassette	PLFY-P•VLMD-E			●	●	●	●	●	●		●	●	●			
	4-way cassette	PLFY-M•VEM-E			●	●	●	●	●	●		●	●	●			
		PLFY-EP•VEM-E *1							●	●							
		PLFY-P•VFM-E		●	●	●	●	●	●								
	Ceiling-concealed	PEFY-P•VMR-E-L/R			●	●	●										
		PEFY-P•VMS1(L)-E		●	●	●	●	●	●								
		PEFY-M•VMA(L)-A			●	●	●	●	●	●	●	●	●	●	●		
		PEFY-P•VMA3-E *2								●	●	●					
		PEFY-P•VMHS-E						●	●	●	●	●	●	●	●	●	●
		PEFY-P•VMHS-E-F															●
	Ceiling-suspended	PCFY-P•VKM-E						●		●			●	●			
	Wall-mounted	PKFY-P•VLM-E	●	●	●	●	●	●	●								
		PKFY-P•VKM-E								●			●				
	Floor-standing	PFFY-P•VKM-E2			●	●	●	●									
		PFFY-P•VLEM-E			●	●	●	●	●	●							
		PFFY-P•VCM-E			●	●	●	●	●	●							
	Lossnay *3		GUF-50/100RD(H)4														

*1 Authorized connectable indoor units are as follows;

PUMY-P250 : PLFY-EP63VEM-E × 4, PUMY-P300 : PLFY-EP50VEM-E × 1 + PLFY-EP63VEM-E × 4

*2 Authorized connectable indoor units are as follows;

PUMY-P250 : PEFY-P63VMA3-E × 4, PUMY-P300 : PEFY-P80VMA3-E × 1 + PEFY-P71VMA3-E × 3

*3 Do not connect Lossnay remote controller(s). (PZ-61DR-E, PZ-60DR-E, PZ-52SF-E, PZ-43SMF-E)